#### SPECIFICATION SHEET

INNER IP2 PACKAGING

# **CODE:330**

HIGH PERFORMANCE POLYPROPYLENE JAR AND SEALED CLOSURE

### SUITABLE FOR MOST CORROSIVES AND TOXIC SUBSTANCES

#### **NOTES:**

The *BioTube*<sup>™</sup> has a Nominal Capacity of 330ml, and is capable of withstanding **110 kpa** 

The closure is internally threaded polypropylene which is secured tightly by the use of a Bung Key at the head. The standard bung seal is EPDM.

This container is suitable for:		
Flammable Liquids	(Class 3)	
Flammable Solids	(Class 4)	
Oxydizing Agents	(Class 5)	
Peroxides	(Class 5)	
Toxics	(Class 6.1)	
Infectious Substance	es (Class 6.2)	
Some Radioactives	(Class 7)	
Most Corrosives	(Class 8)	


It is the Shippers responsibility to ensure that products are compatible with their containers and closures.

This *BioTube*<sup>™</sup> may be transported in a variety of outer packagings and can be used as a **Primary Receptacle** or **Secondary Packaging** under **ICAO/IATA Packing Instruction 602** for Infectious Substances and under **IATA** 

Packing Instruction 650 for Diagnostic Specimens.

Further details on request.

## A FULLY AUTOCLAVABLE POLYPROPYLENE CONTAINER

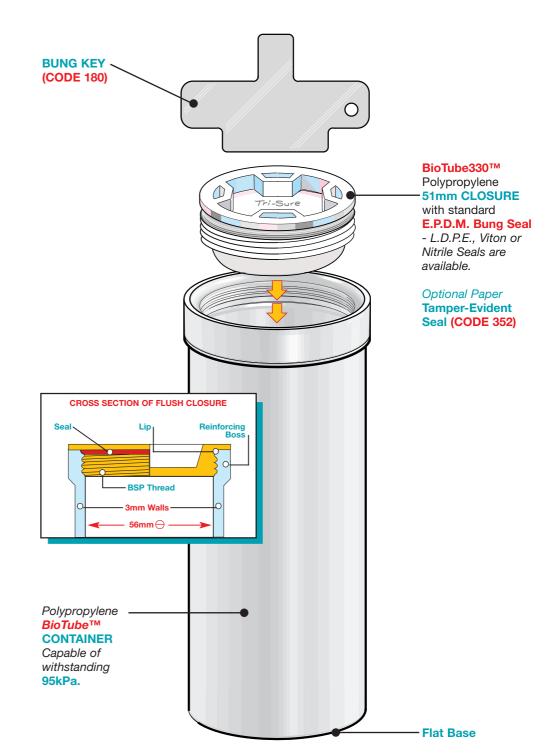



AIR SEA CONTAINERS LTD. 521 Cavendish Street Birkenhead, CH41 8FZ Great Britain Tel: +44 (0) 151 653 1500 Fax: +44 (0) 151 653 1515 Web site: www.airseadg.com E-mail: uk@airseadg.com

Radius
Internal Diameter:
<b>External Diameter</b>
External Height:
Internal Height:
Overall Height:

## NOMINAL DIMENSIONS

<b>28</b> mm	Body Wall Thickness:	3mm
<b>56</b> mm	Aperture Wall Thickness:	3mm
<b>62</b> mm	Bung Size:	<b>51</b> mm
<b>175</b> mm	<b>Overall Weight:</b>	100gms
<b>155</b> mm	Nominal Capacity:	<b>330</b> ml
<b>175</b> mm	Brimful Capacity:	<b>343</b> ml